


# 16 CH Half Real-Time 720P AHD Hybrid DVR

SA-16200AHD-1(1U)

720P

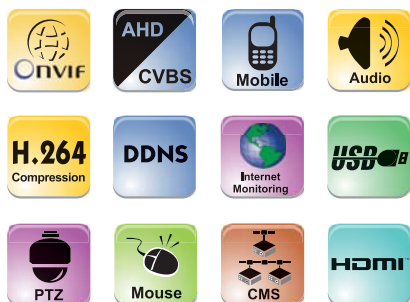

## Specifications

<b>MODEL</b>		SA-16200AHD(1U)	
<b>System</b>	<b>Compression Format</b>	High profile H.264	
	<b>OS</b>	Embedded Linux	
	<b>Format</b>	Hybrid	
<b>Video</b>	<b>Input</b>	16CH AHD Standard BNC/2CH IP Via Network	
	<b>Standard Output</b>	VGA	
	<b>Advanced Output</b>	HDMI	
<b>Audio</b>	<b>Input</b>	4CH	
	<b>Output</b>	1CH	
	<b>Two Way Audio</b>	Yes	
<b>Recording</b>	<b>AHD</b>	<b>Real-Time Recording 720P</b>	16CH 720P Half Real-Time 240FPS (NTSC)/200FPS (PAL)
		<b>960H</b>	No
		<b>Analog</b>	<b>Real-Time Recording 960H</b>
	<b>D1</b>		No
	<b>CIF</b>		No
	<b>IP</b>	<b>Real-Time Recording 1080P</b>	2CH 720P Real-Time No
		<b>960P</b>	60FPS (NTSC)/50FPS (PAL)
		<b>720P</b>	60FPS (NTSC)/50FPS (PAL)
	<b>General</b>	<b>Recording Modes</b>	Schedule, Manual, Motion
	<b>Playback</b>	<b>Playback Channel</b>	8CH
<b>Search Mode</b>		Time, Event, File Management	
<b>Backup</b>	<b>USB</b>	1 USB 2.0 Port	
	<b>DVD Burner</b>	Yes	
	<b>Backup Format</b>	AVI/DAT	
<b>Remote Application</b>	<b>AHD Stream</b>	Master Stream 1-12/15FPS@720P; Sub-Stream 1-12/15FPS@CIF	
	<b>Analog Stream</b>	Master Stream 1-25/30FPS@960H; Sub-Stream 1-12/15FPS@CIF	
	<b>IP Stream</b>	Master Stream 1-25/30FPS@720P; Sub-Stream 1-25/30FPS@CIF	
	<b>Browser</b>	IE, Chrome, Safari, Firefox (Mac OS, Windows XP/Vista/7/8)	
	<b>Master Stream in Network</b>	Yes	
	<b>CMS</b>	Yes	
	<b>3G</b>	ProvisionCAM for iPhone/Android; ProvisionHD for iPad/Android Tablet	
<b>User Access</b>	10 Users Online with Professional Authority Management		
<b>Alarm</b>	<b>Input</b>	No	
	<b>Output</b>	No	
<b>Storage</b>	<b>HDD</b>	2 SATA (3TB)	
	<b>E-SATA</b>	No	
<b>PTZ</b>	<b>Connection</b>	RS-485 / IP Via network	
	<b>Supported Protocols</b>	Pelco D, Pelco P, Samsung, Visca	
	<b>Supported Controls</b>	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus	
<b>Network</b>	<b>Ethernet</b>	100 Mbps (RJ-45)	
	<b>Protocol</b>	TCP/IP, DHCP, DDNS, NTP, SMTP	
<b>Others</b>	<b>Dimension</b>	W430xD300xH55mm	
	<b>IR Controller</b>	Yes	
	<b>Power Supply</b>	12V/4A	
	<b>Operation Temperature</b>	0°C ~50°C	