

IR VARI-FOCAL DOME CAMERA



DI-390IPVF
DI-380IPVF



1/3" CMOS Sensor
2 / 1.3 Mega-Pixel
True Day & Night (IR Cut Removable)
0 Lux (IR On) Min. Illumination
ONVIF

Digital WDR
3D Noise Reduction
BLC/HLC
Motion Detection and Privacy Masking
2.8-12mm Vari-Focal Lens


25m IR Illumination
PoE Support
1 Way Audio
IP 66 Protection

Specifications

Camera	Video	Model	DI-390IPVF	DI-380IPVF
		Image Sensor	Sony IMX122 1/3" CMOS	Sony IMX138 1/3" CMOS
Effective Pixels	1920x1080	1280x720		
Electronic Shutter	1/25s ~ 1/100000s			
Day & Night	ICR			
Min. Illumination	0lux (IR ON)			
Audio	Audio compression	G711A		
Communication	Two Way Audio			
Image Enhancement	Image Settings	AWB, AES, AGC Adjustable Exposure Mode (Auto / Manual) BLC, HLC Adjustable Sharpness, Saturation, Brightness & Contrast Adjustable		
	WDR Range	Digital WDR		
	Noise Reduction	3D-DNR		
	Image Orientation	Mirror/Flip		
	Privacy Zone	Yes		
	Motion Detection	Yes		
	Video Compression	H.264		
Compression	Resolution	1080P (1920x1080)*, 960P (1280x960)*, 720P (1280x720), VGA, QVGA		
	Multi-stream	1920x1080 (1~30fps)* / 1280x960 (1~30fps) / 1280x720 (1~30fps) / 1280x720 (1~30fps) / 640x480 (1~30fps) / 320x240 (1~30fps)		
	Bit rate	64Kbps ~ 8Mbps	64Kbps ~ 4Mbps	
	Encode Mode	VBR/CBR		
	Image Quality	Five levels under VBR; Free adjustment under CBR		

Housing	IR Distance	25m (42 IR LED)
	Lens	2.8-12mm
	Iris	Fixed Iris
	Lens Mount	Φ14 mount
	Water-proof	IP66
	Bracket	3-Axis Ball
	Dimensions	Φ119mm×82mm
	Weight(gross)	669g
Connectivity	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	CVBS (BNCx1)
	Mic Connectivity	1Ch Input
	SD Card	No
	RS485	No
Network	Alarm	No
	Remote Monitoring	IE Browsing, CMS 2.0 Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Yes
Others	Ethernet	100Mbps
	PoE	Yes
	Power Supply	DC12V/PoE, 180mA (Max)
Work Environment	-10 C ~ 50 C , 10%~90% Humidity	

*DI-390IPVF Model Only

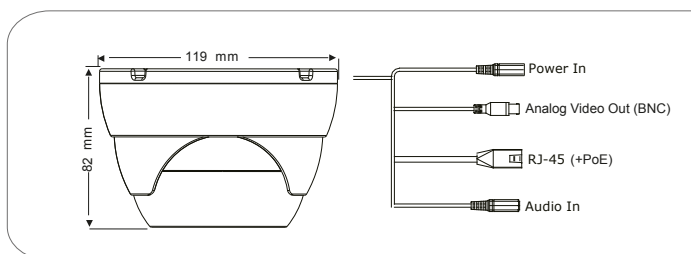

Junction Box is available

