

# AHD IR BULLET CAMERA FIXED LENS

I3-390AHD36




| MODEL                  | I3-390AHD36                                      |
|------------------------|--|
| Image Sensor           | 1/3" Sony 2MP Sensor                             |
| Effective Pixels       | 1984(H)×1225(V)                                  |
| Scanning System        | Progressive                                      |
| Resolution             | Digital:1920x1080, Analog:960H                   |
| Min. Illumination      | 0.01Lux  |
| Day & Night            | True Day&Night (ICR)                             |
| IR LED                 | 3 LED Array (25m)                                |
| OSD Menu               | Available via CoC Only (11 Languages)            |
| CoC Support            | Yes  |
| Day & Night Mode       | EXT, Color, B&W, Auto                            |
| Backlight Compensation | Off/BLC/HSBLC                                    |
| S/N Ratio              | ≥72dB (AGC Off)                                  |
| White Balance          | ATW,AWC,Indoor,Outdoor,Manual,AWB                |
| Noise Reduce           | 3D-DNR For AHD / 2D-DNR For CVBS                 |
| Video Output           | AHD/CVBS (Signal Selectable via Jumper on cable) |
| Defog                  | Off/On   |
| Privacy Mask           | On/Off (4 Areas)                                 |
| Motion Detection       | On/Off (4 Areas)                                 |
| D-Effect               | Freeze, Mirror, Negative Image                   |
| Lens                   | 3.6mm  |
| Power                  | DC12V±10%, ~410mA                                |
| Operation Temp.        | -20°C~+50°C                                      |
| Waterproof             | IP66   |
| Dimension              | 206.5*67.6*68.5mm                                |
| Net weight             | 380g   |

## Main Features:

- Sensor: 1/3" Sony, 2 Mega-Pixel
- Selectable output-1080P AHD/Analog
- Lens: 3.6mm Mega-Pixel Fixed
- True Day & Night – ICR
- IR Range: 25m (3 Array LED)
- IP66
- CoC Support
- Weight: 380g
- Power: DC 12V, ~410mA



Junction Box (PR-B37JB)  
is available

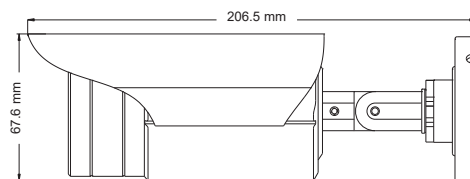

Without Jumper: AHD Output



With Jumper: Analog Output