


# HIDDEN IR PIR CAMERA

IV-322CS  
IV-370CS



For Effio-E Model:

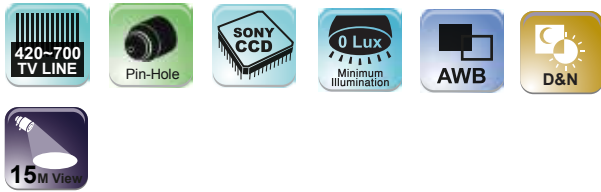

MODEL	IV-322CS	IV-370CS
Image Sensor	1/3" Sony CCD (PAL:ICX811BK/NTSC:ICX638BK)	1/3" Sony CCD (PAL:ICX633BK/NTSC:ICX632BK)
DSP System	CXD4140	CXD3142
Effective Pixels	PAL:976(H)x582(V) NTSC:976(H)x494(V)	PAL:537(H)x597(V) NTSC:537(H)x505(V)
Scanning System	PAL/NTSC	
Horizontal Resolution	700TVL	420TVL
Min. Illumination	0.03 Lux / F1.0 (0 Lux IR ON)	0.05 Lux / F1.0 (0 Lux IR ON)
IR LED	18pcs(10M)	
OSD Menu	Available( 7 languages )	Not Available
Backlight Compensation	BLC/HLC/OFF	Not Available
Sync. System	Internal	
S/N Ratio	≥48db (AGC Off)	
White Balance	Atw/Push/User Anti CR/Manual	Auto (AWB)
Gamma Correction	0.45	
Gain Control	Yes	Auto (AGC)
Motion Detection	On/Off( 4 Zone )	Not Available
Privacy Masking	On/Off( 4 Zone )	Not Available
Mirror(H-REV)	On/Off	Not Available
Sharpness	On/Off (Level Adjustable)	Not Available
D/N Selection	Color/B/W/Auto	Not Available
ATR	On/Off	Not Available
Noise Reduce	2D-DNR	Not Available
Picture Adjustment	Yes	Not Available
Analog Output	Composite, BNC (1.0Vp-p.75hm)	
Lens	3.7mm Pinhole lens	
Power	DC12V/150mA	
Dimension	33L x 60W x 104H mm	
Net Weight	230g	

## Main Features:

Miniature Hidden camera  
Built-in Pin-Hole Lens  
Compact size and beautiful design  
Auto White Balance  
For Day & Night Conditions

### IV-370CS

SONY EFFIO-E  
1/3" CCD 700 TVL  
2D Noise Reduction  
OSD Menu  
Motion Detection and Privacy Masking  
Color Rolling Control  
BLC/HLC/AGC  
ATR (Adaptive Tone Reproduction)

### IV-322CS

1/3" SONY CCD  
420 TVL  
Auto White Balance

